

$\Phi 10.5\text{mm}$ 650nm Laser Module

$P_o < 1\text{mW}$

Features

1. APC (auto power control) IC inside
2. Low current consumption of the APC circuit
3. Surge current protection
4. High quality glass lens for output beam
5. Adjustable focus




Absolute maximum ratings

Item	Symbol	Rating	Unit
Power supply voltage	V_{cc}	3.3	V
Laser Module optical output power	P_o	<1	mW
Operation temperature	T_{opr}	-5~50	°C
Storage temperature	T_{stg}	-20~70	°C

Electrical and optical characteristics ($T_c=25^\circ\text{C}$)

Item	Symbol	Min.	Typ.	Max	Unit	Condition
Wavelength	λ	-	655	-	nm	$P_o = 1\text{mW}$
Operation current	I_{op}	-	-	30	mA	$P_o = 1\text{mW}$ $V_{cc}=3\text{V}$
Operation voltage	V_{op}	2.5	-	3.3	Volt	
Laser Beam spot size at 10m		<8mm				
Divergence angle		0.9 mrad				
Mean time to failure (MTTF) 25°C		>10000 hrs				

Outline dimensions (Units: mm)

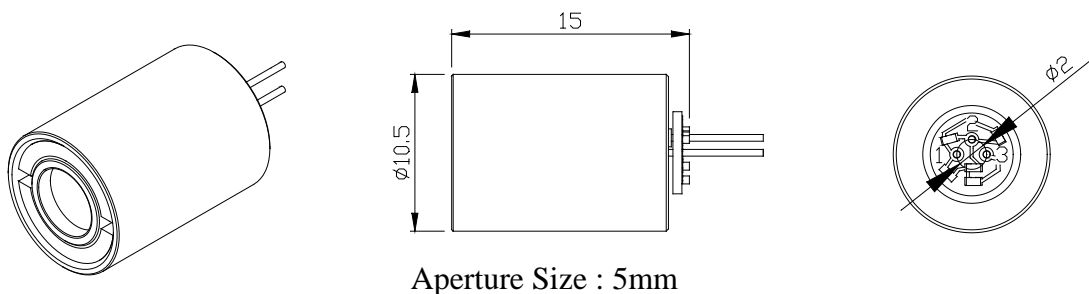

Laser Safety Precautions


1. Do not look into the laser beam directly by eyes. The laser beam may cause severe damage to human eyes.
2. Optical Lens is made of plastic or glass. Do not contaminate lens by soiling, oil or chemical.

** For reference only. Contents above are subject to change without notice.*


Contact

For US, Canada	Ayase America Inc.	e-mail: info@ayaseamerica.com	+1-408-988-5277
For EU	Ayase Europe GmbH	e-mail: info@ayase-europe.de	+49-0-6122-533-811
For Japan	Ayase Co., Ltd.	e-mail: info@ayasecorporation.com	+81-45-532-9501

PIN Assignment:



A type : Heat sink stand (-)



B type :Heat sink stand (+)

Pin 1 : Vcc

Pin 2 : GND


Pin 3 : NC (No external connection)

Instruction manual


1. DC Power connection mode 1

A type : Heat sink stand (-)

B type :Heat sink stand (+)

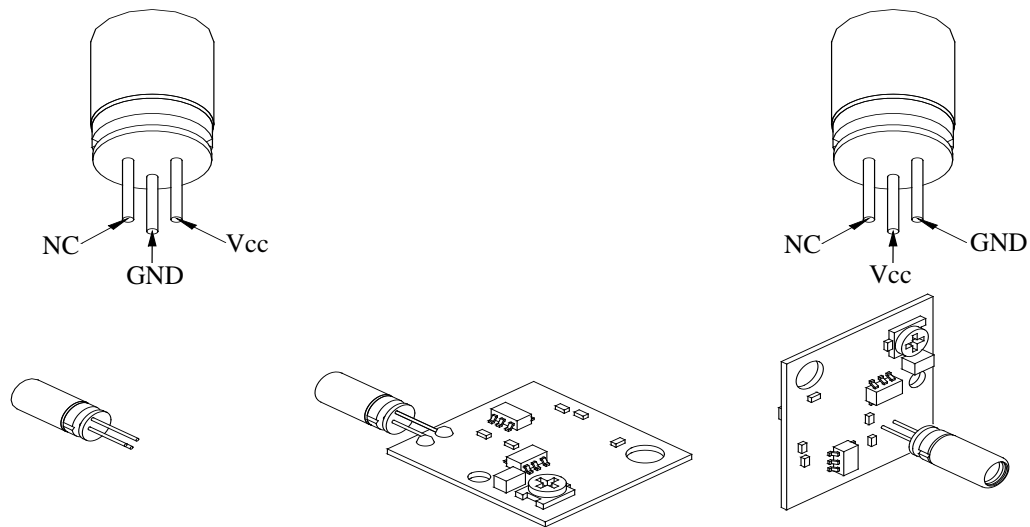

2. DC Power connection mode 2

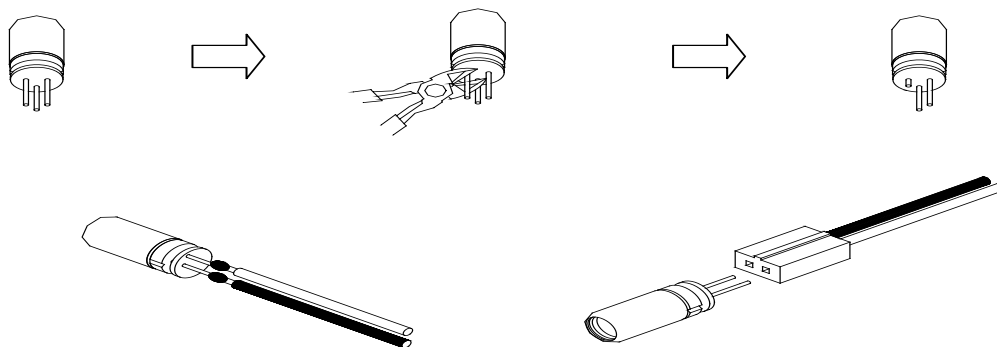

** For reference only. Contents above are subject to change without notice.*

Contact

For US, Canada Ayase America Inc.
For EU Ayase Europe GmbH
For Japan Ayase Co., Ltd.

e-mail: info@ayaseamerica.com
e-mail: info@ayase-europe.de
e-mail: info@ayasecorporation.com

+1-408-988-5277
+49-0-6122-533-811
+81-45-532-9501